

Hydraulic Filters

flow rates	filtration degrees	water for cleaning	minimum operating pressure
up to 400 m³/h (1760 US gpm)	500-80 micron	less than 1% of the total flow	2 bar (30 psi)

The most efficient hydraulic filters that require no external power source.



features:

- Large filtration area, reliable operating mechanism and simple construction make the T100 filters the ideal solution for agricultural and municipal filtration systems where no power is available.
- Automatic flushing according to pressure differential.
- No interruption of downstream flow during flushing.
- Minimal volume of reject water.

How the Hydraulic filters work

General

The Timex HYDRAULIC Series are mid range automatic filters, ideal for remote installation sites, with a water-driven self-cleaning mechanism that doesn't require external power source to operate.

With their various screen areas the Hydraulic models support flow-rates of up to 400 m³/h (1760 US gpm), with filtration degrees of 500 down to 80 micron and inlet/outlet diameters from 2"-10".

The Filtering Process

The filtration process begins when raw water flows through the filter inlet (1) into the coarse screen (2). Here, the water is pre-filtered in order to protect the cleaning mechanism from large debris. The water then passes through the inner surface of the fine screen; dirt particles are trapped and accumulate inside the filter while clean water flows through the filter outlet. The gradual dirt buildup on the inner screen surface causes a filter cake to develop, with a corresponding increase in the pressure differential across the screen.

The Self-cleaning Process

When the pressure differential across the screen reaches a pre-set level of 0.5 bar, the Hydraulic filter's rinse controller (3) starts the cleaning process by opening the internal flush valve (4). This results in the release of a back-flush stream, flowing through the nozzles (5) out of the hollow Suction Scanner Shaft (6) and the Turbine (7) to the Drainage pipe (8).

M100 Models


Timex's "HYDRAULIC SERIES" consists of the following models:

T100-750 for up to 40 m³/h (176 US gpm)

T100-1500 for up to 80 m³/h (352 US gpm)

T100-4500 for up to 180 m³/h (793 US gpm)

T100-6800 for up to 400 m³/h (1760 US gpm)

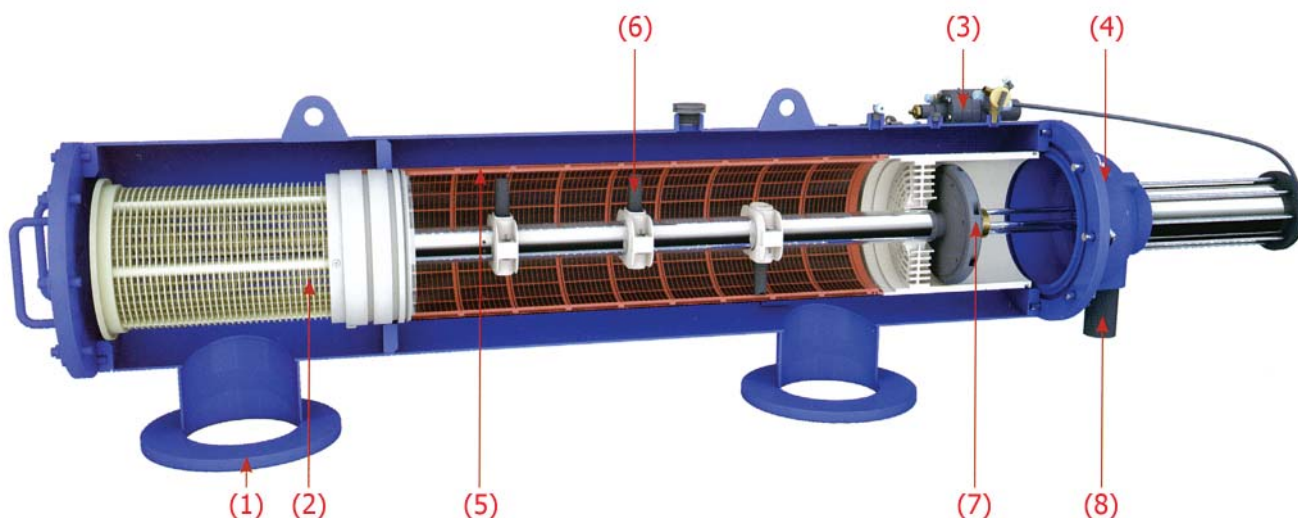

Technical Specifications

Filter Type	T100 750	T100 1500	T100 4500	T100 6800
Genelal Data				
Maximum flow rate*	40 m³/h (175 US gpm)	80 m³/h (350 US gpm)	180 m³/h (793 US gpm)	400 m³/h (1760 US gpm)
Inlet/Outlet diameter (mm)	2" 3" (50 80)	3" 4" (80 100)	4" 6" (100 150)	4" 6" 8" 10" (100 150 200 250)
Standard filtration degrees	Molded stainless steel screen 500, 300, 200, 130, 100, 80 micron			
Min. working pressure	2 bar (30 psi) For lower pressure please consult manufacturer			
Max. working pressure	8 bar (116 psi)		10 bar (150 psi)	
Max. working temperature	55°C (131°F)			
Weight (empty)	2" 22 kg (48.5 lb) 3" 25 kg (55 lb)	3" 30 kg (66 lb) 4" 35 kg (77 lb)	4" 90 kg (198 lb) 6" 115 kg (253.5 lb)	4" 110 kg (242.5 lb) 6" 120 kg (264.5 lb) 8" 140 kg (308.6 lb) 10" 158 kg (348 lb)

* Consult manufacturer for optimum flow depending on filtration degree & water quality.

Flushing Data				
Minimum flow for flushing (at 2 bar -30 psi)	15 m³/h (66 US gpm)	20 m³/h (88 US gpm)	26 m³/h (114 US gpm)	30 m³/h (132 US gpm)
Reject water volume per flush cycle (at 2 bar -39 psi)	15 liter (4 US gallon)	20 liter (5.2 US gallon)	125 liter (33 US gallon)	150 liter (40 US gallon)
Flushing cycle time	10 seconds	10 seconds	15 seconds	15 seconds
Exhaust valve	1.5" 40 mm	1.5" 40 mm	1.5" 40 mm	1.5" 40 mm
Flushing criteria	Differential pressure of 0.5 bar (7 psi), time intervals and manual operation			

Screen Data				
Filter area	750 cm² (161 in²)	1500 cm² (232 in²)	4500 cm² (698 in²)	6800 cm² (1054 in²)
Screen types	Molded Weave Wire stainless steel 316L			

Construction Materials	
Filter housing and	Epoxy-coated carbon steel 37-2. (Stainless Steel 316 on request)
Filter lid	Epoxy-coated carbon steel 37-2. (Stainless Steel 316 on request) High density Polypropylene
Cleaning mechanism	PVC and Stainless Steel 316L
Exhaust valve	Brass, Stainless steel 316, BUNA-N
Seals	BUNA-N
Control	Aluminum, Brass, Stainless steel 316, PVC, Acetal

* Timex offers a variety of construction materials. Consult manufacturer for specifications

T100 750



T100 1500




T100 4500










T100 6800



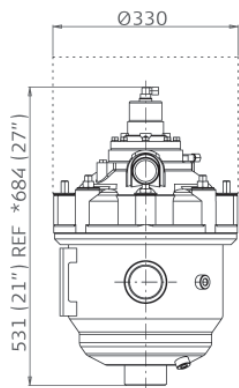

Pressure Loss Graphs

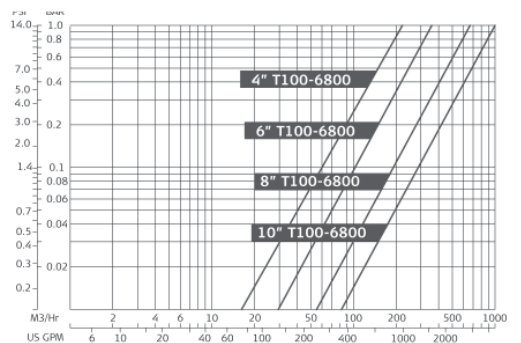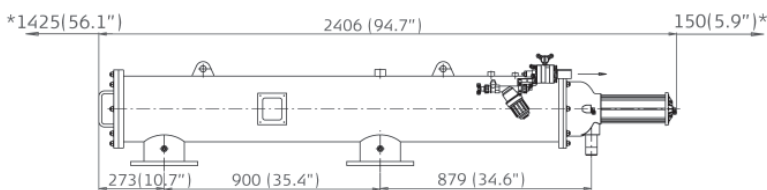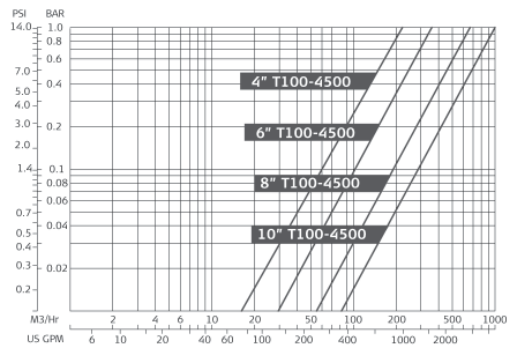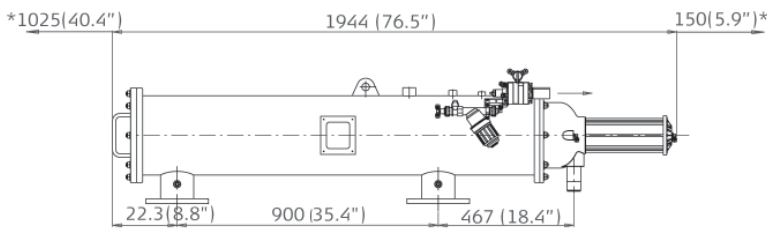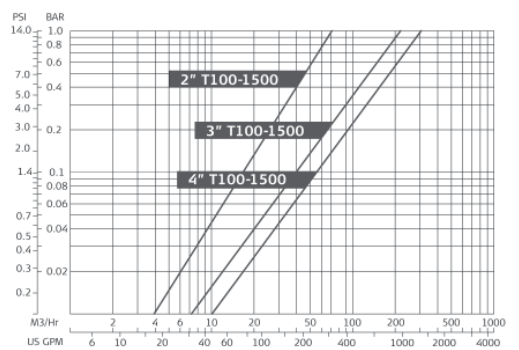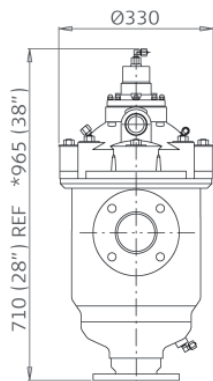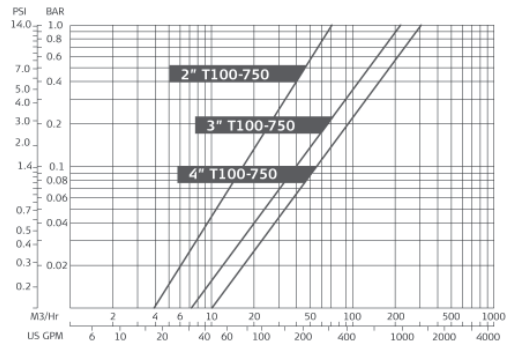

Dim. In mm (inch)

*Approx. length required for maintenance



industry

Automotive, Aviation,
Ballast treatment,
Electronics, Food &
Beverage; Mining,
Oil & Gas,
Petrochemical, Power
Generation, Pulp &
Paper

municipal

Potable Water, Waste Water,
Desalination, Brackish
Water, High rise buildings,
Pre-filtration to Membranes

irrigation

Agriculture, Golf & Turf,
Green Houses

aquaculture

Fish Farming, Recirculating
Aquaculture Systems (RAS),
Fish Processing Industry

Factory & Head Office

ASO 2 OSB, 2036. Street No : 12
Sincan / ANKARA / TURKEY

Tel: +90 312 815 52 46-47

Fax: +90 312 815 52 48

E-mail: info@timex.com.tr

www.timex.com.tr

